

Technical Manual

JBL Control 312CS



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohms
- Power Capacity: 400 Watts (1000 W peak)
- Frequency Response: 30 Hz – 4.5 kHz (–10 dB)
- System Sensitivity: 92 dB measured half-space

SYSTEM COMPONENTS:

- Low Frequency Transducer: Kevlar reinforced cone, 75 mm (3 in) voice coil
- DC Resistance: 6.4 ohms ±10%

AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 7.0V Input, 20 Hz to 5 kHz
- B.L.F. Aural Sweep Test: 7.0V Input, 20 Hz to 5 kHz

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 366 mm x 366 mm
14.4 in square baffle x 147 mm (5.8 in) depth from back of baffle
- Net Weight (ea): 23 lbs. (10.45 kg.)

WARRANTY INFORMATION:

- Refer to Warranty Statement packed with each product.

PACKAGE

COMPONENT EXPLODED VIEW

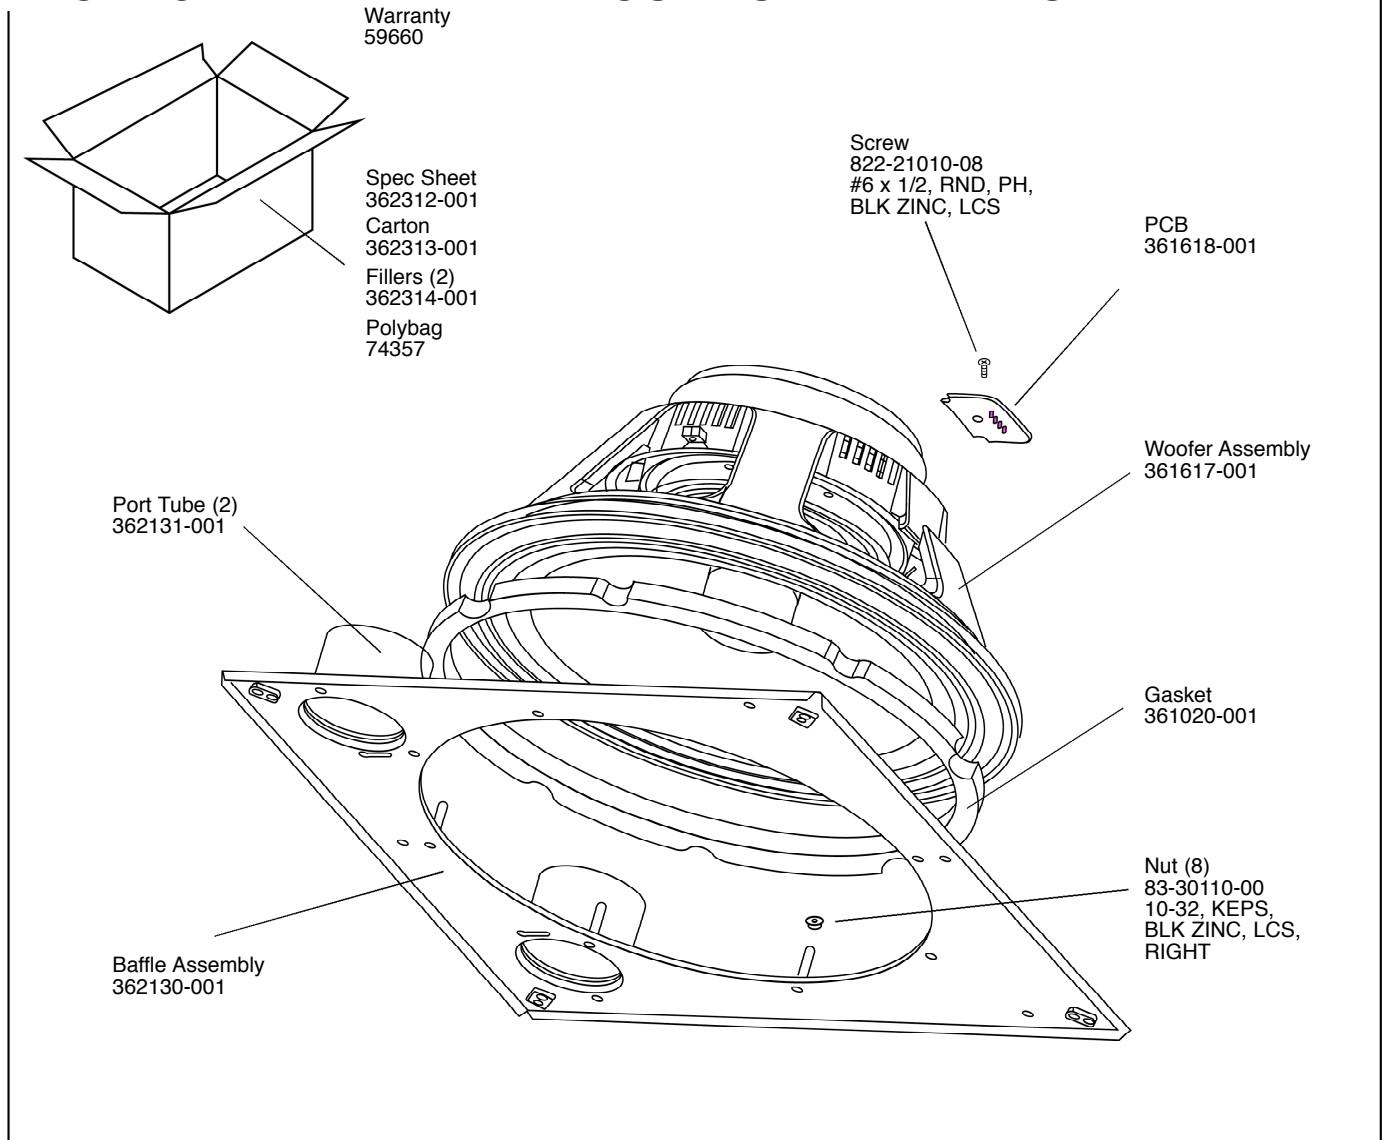

JBL Control 312CS REVA