

Technical Manual

JBL LSR12P/230



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 2 ohm
- Power Capacity: 250W, Continuous
- Frequency Range:
- Sensitivity: -10dBV Into XLR Input With All Switches Down Produces 96dB/@1 Meter
- Crossover Frequency: (Active Crossover Through Input Module): 80 Hz 4th Order Linkwitz-Riley

SYSTEM COMPONENTS:

- Cabinet: (Not For Sale)
- Low Frequency Transducer: 300mm (12 in.) Cone Transducer (252FPL)
- Nominal Impedance: 2 ohm

SYSTEM COMPONENTS: (cont'd)

- DC Resistance: 1.4 ohm ±10%

AURAL SWEEP TEST SPECIFICATIONS:

- (XLR Input With 600 mV, All Dip Switches Down)
- A. L.F. Aural Sweep Test: 12V Input, 10 Hz to 2 kHz


PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 635mm x 394mm x 292mm D (25.0 x 15.5 x 11.5 in. D)
- Shipping Weight: 50 lbs. (22.7 kg.)


WARRANTY INFORMATION:

- Refer to Warranty Statement packed with each product.

PACKAGE

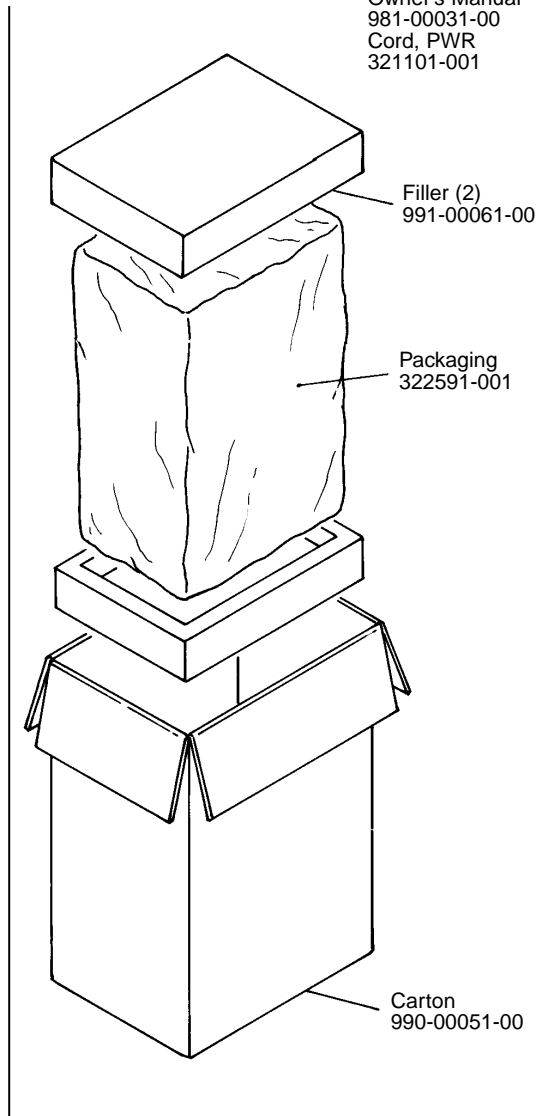

WIRING DIAGRAM

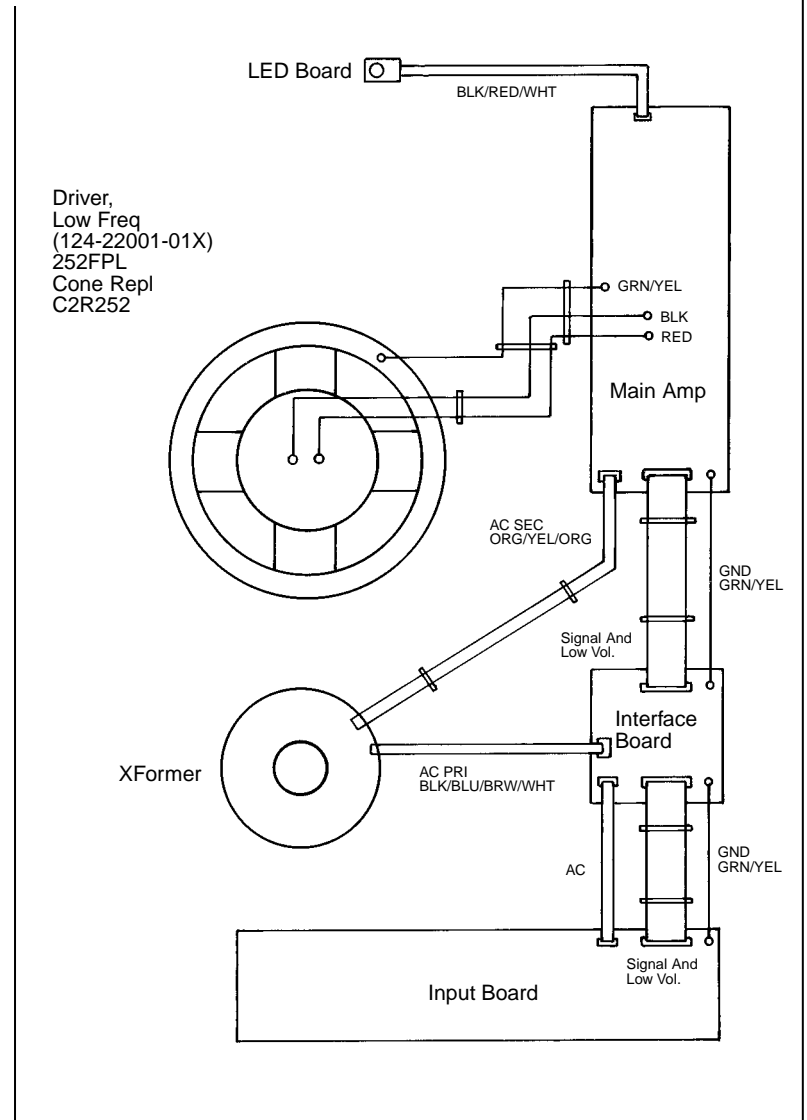

JBL LSR12P/230

COMPONENT EXPLODED VIEW

