

Technical Manual

JBL LSR6328P

SPECIFICATIONS



ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 4 ohm
- Power Consumption: 220W, (IEC 265)
- Power Capacity: H.F. 100W, L.F. 250W
- Frequency Response: 50 Hz–20 kHz (+1, –1.5)
- Sensitivity (LXR Input): +4dB, 96dB @ 1 Meter
(1/4" Input): +10dB, 96dB @ 1 Meter
(All DIP Switches Set Off) +4dBu Signal
- Crossover Frequency: 1.7 kHz

SYSTEM COMPONENTS:

- Cabinet (Not For Sale)
- Low Frequency Transducer: 203mm (8 in.) Cone Transducer (218F-1), (218F-2)
- DC Resistance: 1.8 ohm ±10%

SYSTEM COMPONENTS: (Cont'd)

- High Frequency Transducer: 25mm (1 in.) Diaphragm (053TiS)
- DC Resistance: 3.5 ohm – 3.8 ohm

AURAL SWEEP TEST SPECIFICATIONS:

(XLR Input All DIP Switches Set Off)

- A. System Aural Sweep Test: 1.5V Input, 20 Hz to 30 kHz
- B. L.F. Aural Sweep Test: 7.0V Input, 20 Hz to 5 kHz
- C. H.F. Aural Sweep Test: 1.5V Input, 200 Hz to 20 kHz

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 406mm x 330mm x 325mm D
(16.0 x 13.0 x 12.8 in. D)
- Net Weight: 39 lbs. (17.7kg.)

WARRANTY INFORMATION:

- Refer to Warranty Statement packed with each product.

PACKAGE


Warranty 59660
Owner's Manual
350800-001

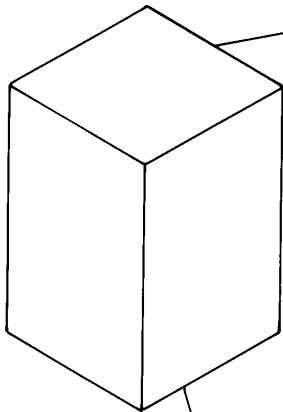

- Filler, Top/Bottom (2) 991-00063-00
- Plastic Bag, 991-00150-00
- Cord, AC, Line, 120V 425-00000-00
- Cord, AC, Line, 230V 425-00000-01
- Y cable, LSR63XX 351139-001

Carton
990-00052-00

WIRING DIAGRAM

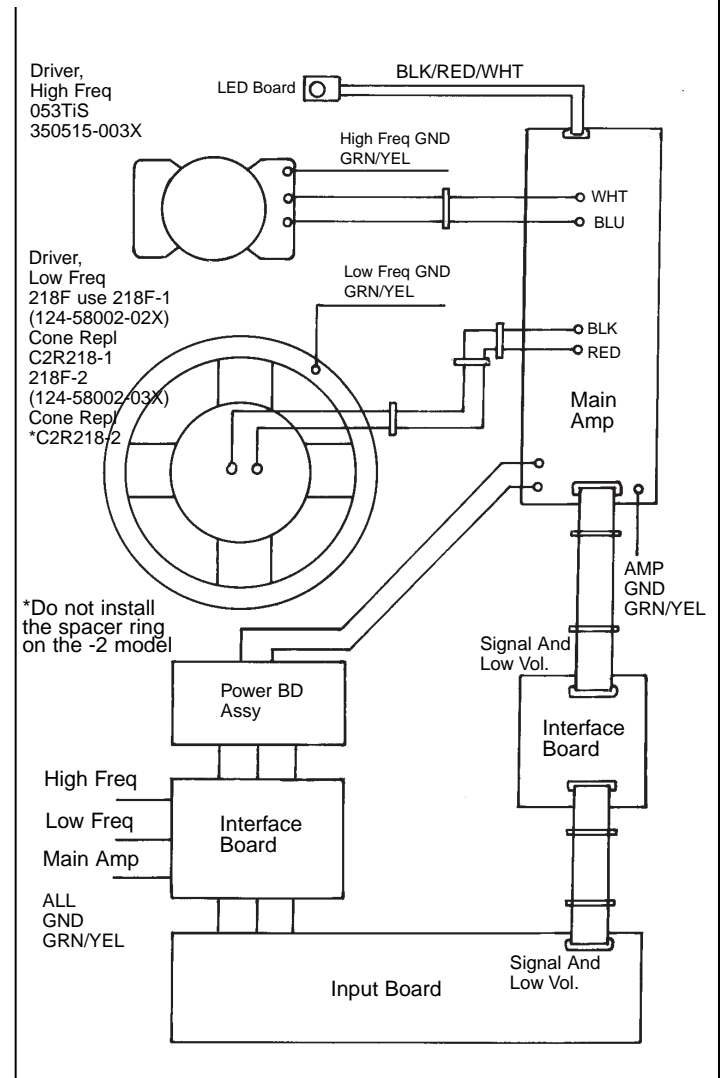

JBL LSR6328P REV N

JBL LSR6328P

COMPONENT EXPLODED VIEW

