

Technical Manual

JBL MRX515



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 Ohms
- Power Capacity: 400W / 800W / 1600W, 2 hrs.
(Cont/ Prog/Peak): 350W / 700W / 1400W, 100 hrs
- Frequency Range: 52 Hz - 20 kHz (-10 dB)
- Frequency Response: 65 Hz – 20 kHz (±3 dB)
- Maximum SPL: 124 dB SPL continuous (130 dB SPL peak)
- System Sensitivity: 98 dB SPL (1 watt @ 1 meter)
- Crossover Frequency: 1.7 kHz

SYSTEM COMPONENTS:

- Cabinet: Enclosure (Not for Sale)
- Grille: 362526-001
- Low Frequency Transducer: 265H-1, 380 mm (15 in) Differential Drive woofer
- DC Resistance: 5.0 ohm ±10%
- High Frequency Transducer: 2408H, 37.5 mm (1.5 in) annular polymer diaphragm, neodymium compression driver
- DC Resistance: 4.8 ohm +/- 0.2 ohm

SYSTEM COMPONENTS: (CONT'D)

- Crossover Network: 364967-001

AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 7.0V Input, 50 Hz to 20 kHz
- B. L.F. Aural Sweep Test: 7.0V Input, 10 Hz to 300 Hz
- C. H.F. Aural Sweep Test: 0.75V Input, 200 Hz to 1.5 kHz


PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 700 x 435 x 470 mm D
(H x W x D) (27.25 x 17.5 x 18.5 in D)
- Net Weight (ea): 43.0 lb (19.5 kg)


WARRANTY INFORMATION:

- Refer to Warranty Statement packed with each product.


PACKAGE

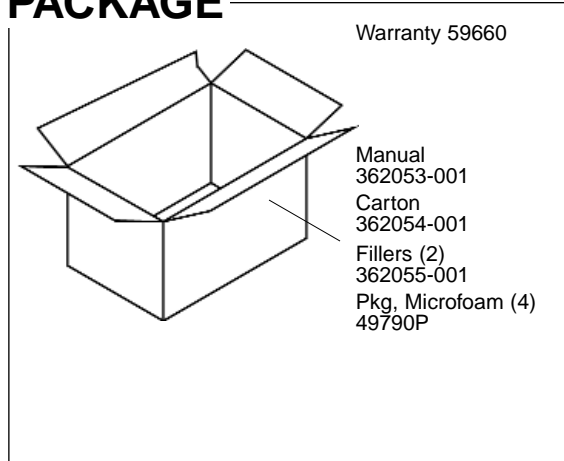

WIRING DIAGRAM

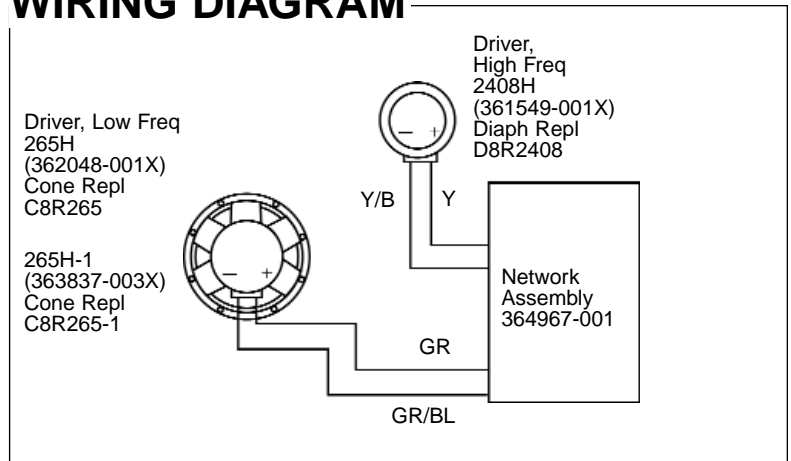

SCHEMATIC (364967-001)

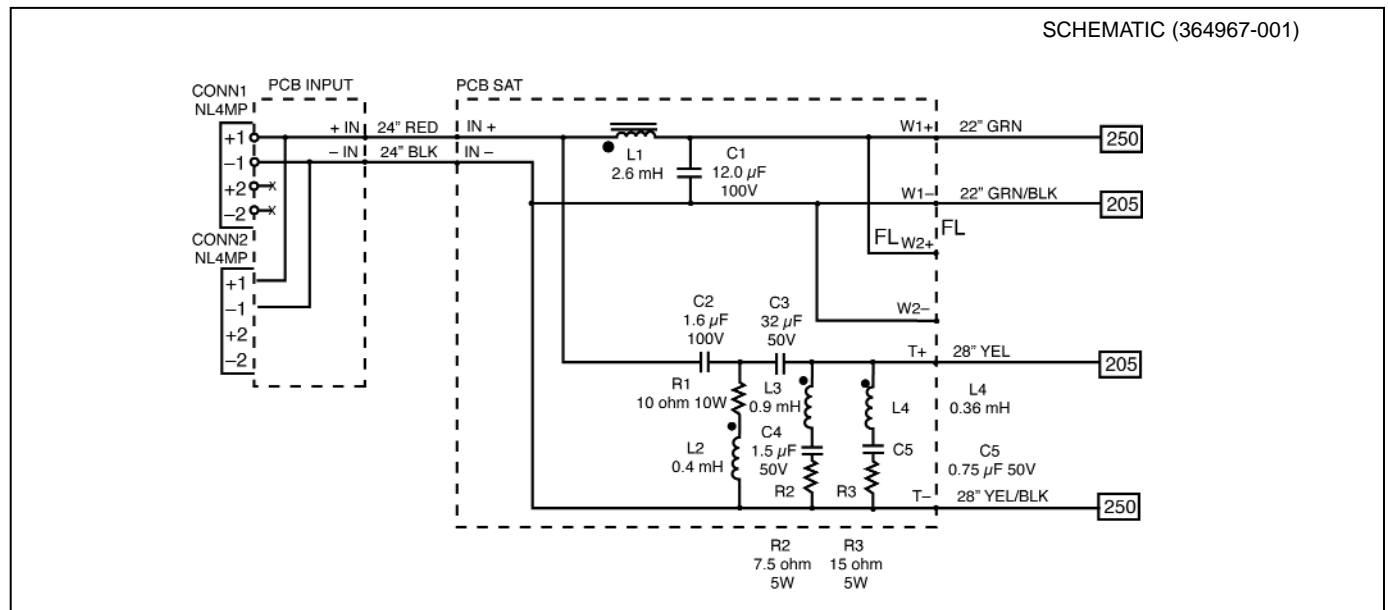

JBL MRX515

COMPONENT EXPLODED VIEW

Note: Black Duraflex repair kit 30052

