


SPECIFICATIONS: NOTE ①

LOAD Z	LOW PASS	CROSS OVER	HIGH PASS	ATTENU- ATION
	500HZ	1KHZ	2KHZ	2KHZ
8	LF -1	LF -6	LF -15	-4, -6, -8, -10
	HF -15	HF -6	HF -4	

CIRCUIT:

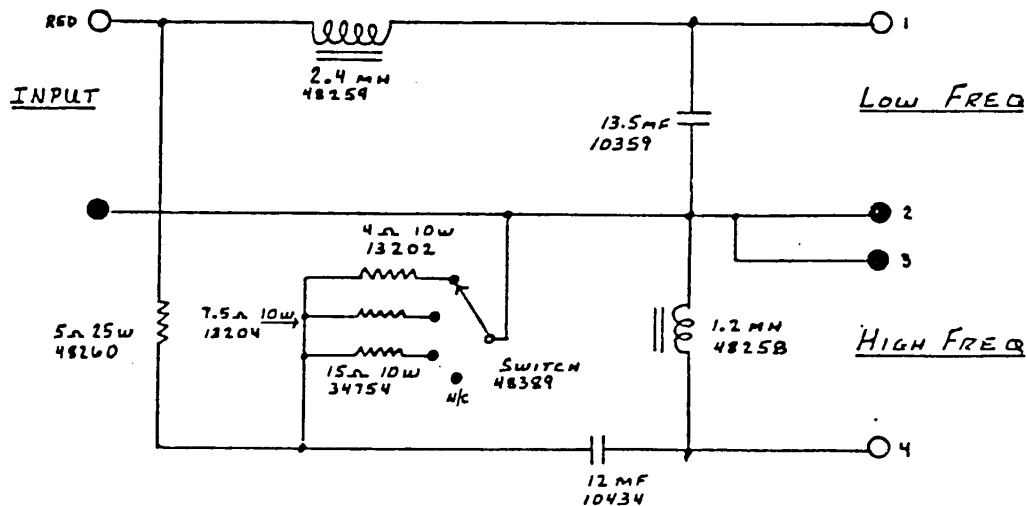

NOTES:

- ① USE STANDARD TEST FIXTURE
- ② MANDATORY REQUIREMENT (ECN 8618) TO CONVERT ALL 3122's to THE 3122A CONFIGURATION TO PROTECT HIGH FREQUENCY DRIVER.