


SPECIFICATIONS: NOTE ①

LOAD Z	LOW PASS	CROSS OVER	HIGH PASS	ATTENUATION
8	700HZ	1KHZ	5KHZ	5KHZ
	LF -6	LF -10		
	HF -15	HF -10	HF -6	VAR

CIRCUIT:

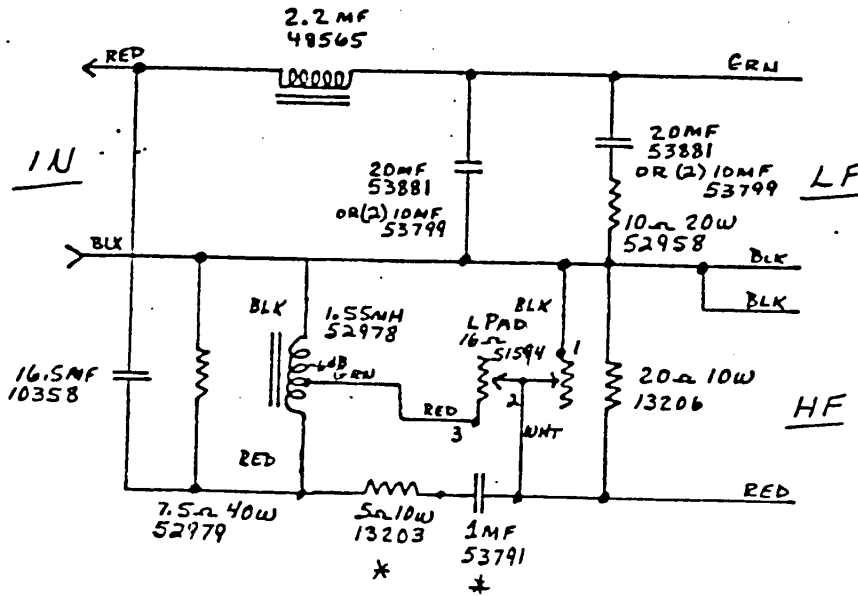

NOTES:

- ① USE STANDARD TEST FIXTURE
- ② HF SECTION - PARTS MARKED (*) MAY HAVE POSITIONS REVERSED IN SOME UNITS, EITHER POSITION "OK"

K	3-76
F	8-74