


Technical Manual

JBL I724



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: LF 8 ohm, HF 8 ohm
- Power Rating: HF 100 W continous program above 1,2 kHz
LF 300W AES
- Frequency Response: 60 Hz - 20 kHz
- Sensitivity: LF 100 dB (2,83 V, 1 m)
HF 105 dB (2,83 V, 1 m)
- Crossover Frequency: 1000 Hz - 1500 Hz (C236)
Low cut 45 Hz

SYSTEM COMPONENTS:

- Cabinets: CP724
- Grille: GP724 (240640)
- Low Frequency Transducer: 300 mm (12 in)
Cone Transducer (2020H)
- DC Resistance: 4,8 ohm ± 10% Aluminium Wire

SYSTEM COMPONENTS: (cont'd)

- High Frequency Transducer: 25 mm (1 in)
Pure Titanium Diaphragm
Compression Driver (2426H)
- DC Resistance: 3,2 ohm ± 8% Aluminium Wire
- Crossover Network: C236

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 646 x 362 x 356 mm
25 3/8 x 14 1/4 x 14 in
- Shipping Weight: 28,5 kg (62,7 IBS)

NEUTRIK CONNECTOR

- Pins 1 ± = Loopthrough
- Pins 2 ± = Input LF
- Pins 3 ± = Input HF
- Pins 4 ± = Loopthrough

⊕ Denotes outward cone movement with positive voltage to pin 2 +, pin 3 +.

WIRING DIAGRAM

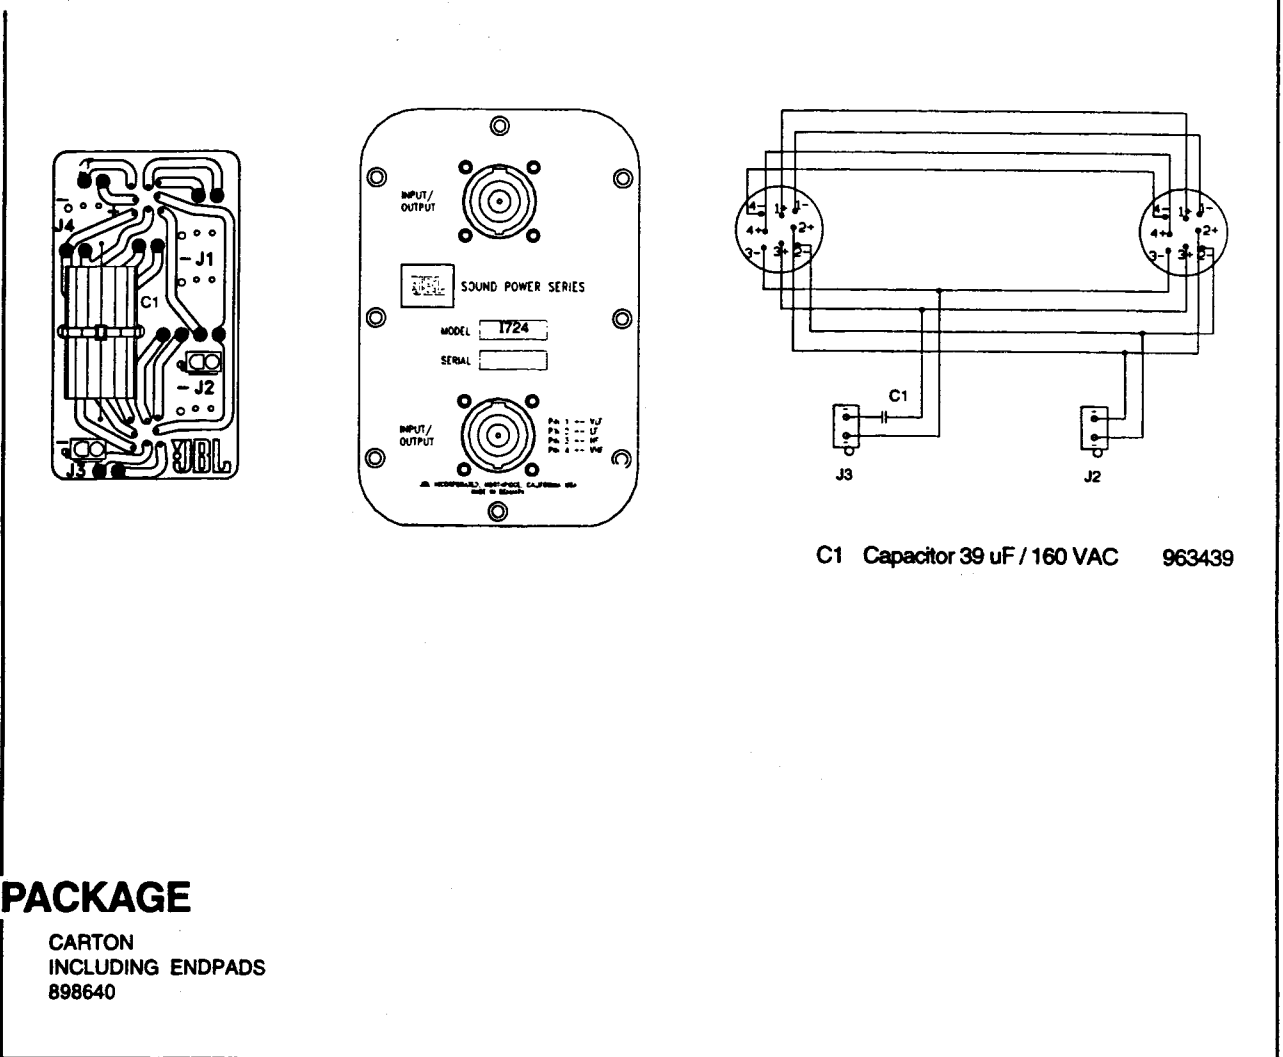

PACKAGE

CARTON
INCLUDING ENDPADS
898640

JBL I724

JBL I724

COMPONENT EXPLODED VIEW

