

Technical Manual

JBL I745



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 4 ohm
- Power Rating: 600 W AES
- Frequency Response: 40 Hz - 3 kHz
- Sensitivity: 102 dB (1m, 2 V Input)
- Crossover Frequency: Active C236

SYSTEM COMPONENTS:

- Cabinet: CI745
- Grill: GI745
- Low Frequency Transducer: 380 mm (15 in) Cone Transducer (M252-8)
- DC Resistance: 4.8 ohm \pm 10% Aluminium Wire

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 680 x 850 x 400 mm
26.77 x 33.46 x 15.75 in)
- Shipping Weight: 65 kg (143.26 lb)

NEUTRIK CONNECTOR

- Pins 1 \pm = Input VLF
- Pins 2 \pm = Loopthrough
- Pins 3 \pm = Loopthrough
- Pins 4 \pm = Loopthrough

⊕ Denotes outward cone movement with positive voltage applied to VLF pin 1 +.

WIRING DIAGRAM

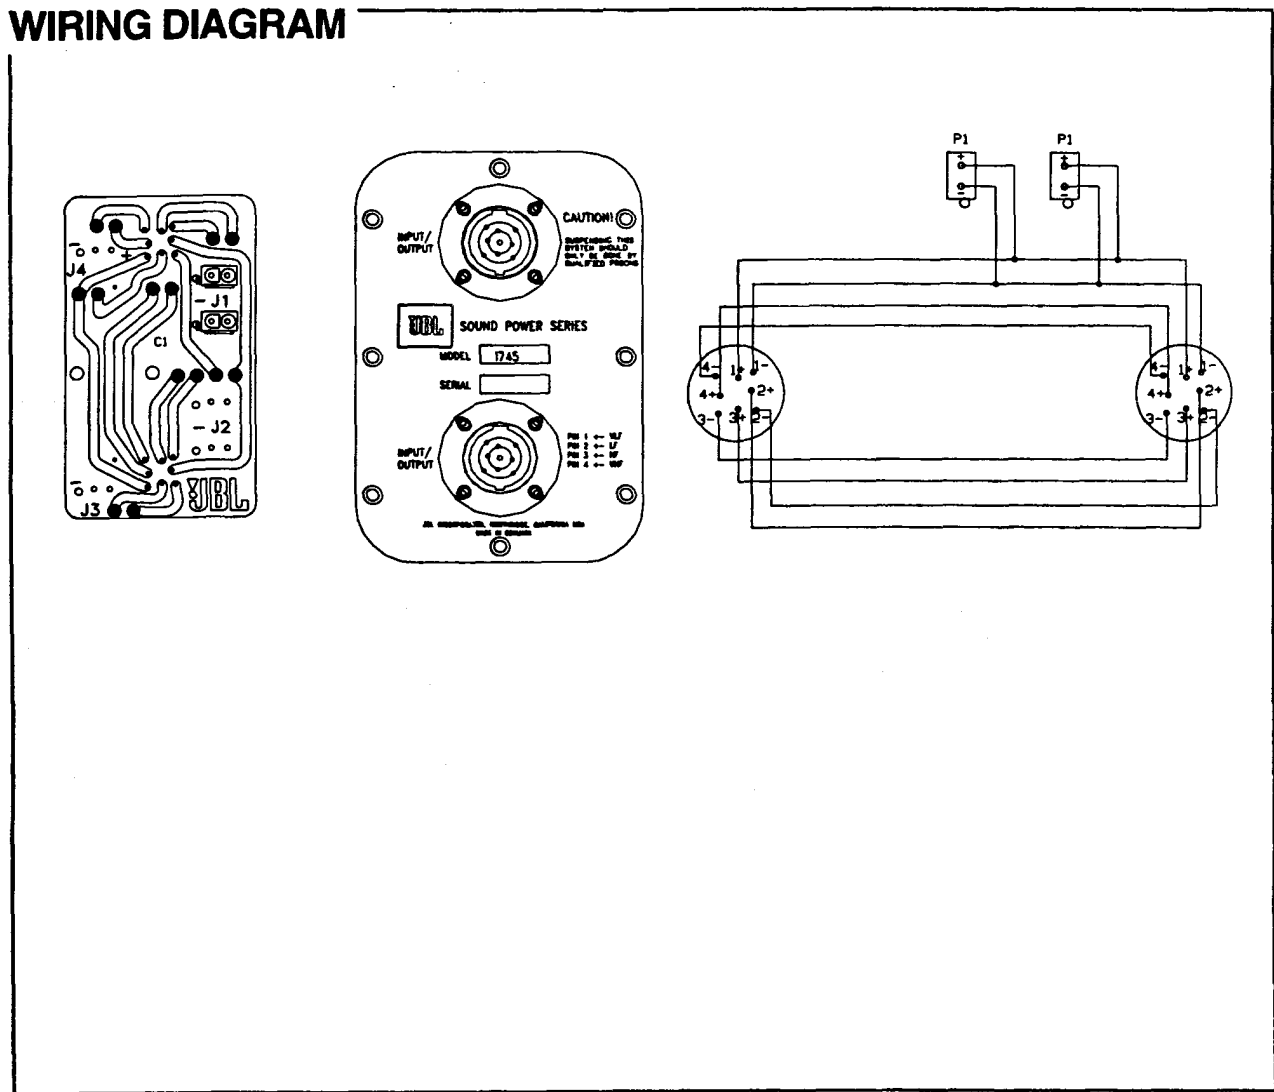

JBL I745

COMPONENT EXPLODED VIEW

