

Technical Manual JBL P798



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 4 ohm
- Power Rating: 1400 W AES
- Frequency Response: 25 Hz - 225 Hz
- Sensitivity: 103 dB (1m, 2V)
- Crossover Frequency: Active C236

SYSTEM COMPONENTS:

- Cabinet: CP798
- Grill: GP798
- Low Frequency Transducer: 460 mm (18 in) Cone Transducer (2243H)
- DC Resistance: 5.2 ohm \pm 10% Copper Wire

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 750 x 1300 x 550 mm
29.53 x 51.18 x 21.65 in)
- Shipping Weight: 125 kg (275 lb)

NEUTRIK CONNECTOR

- Pins 1 \pm = Input VLF
- Pins 2 \pm = Loopthrough
- Pins 3 \pm = Loopthrough
- Pins 4 \pm = Loopthrough

⊕ Denotes outward cone movement with positive voltage applied to VLF pin 1 +.

WIRING DIAGRAM

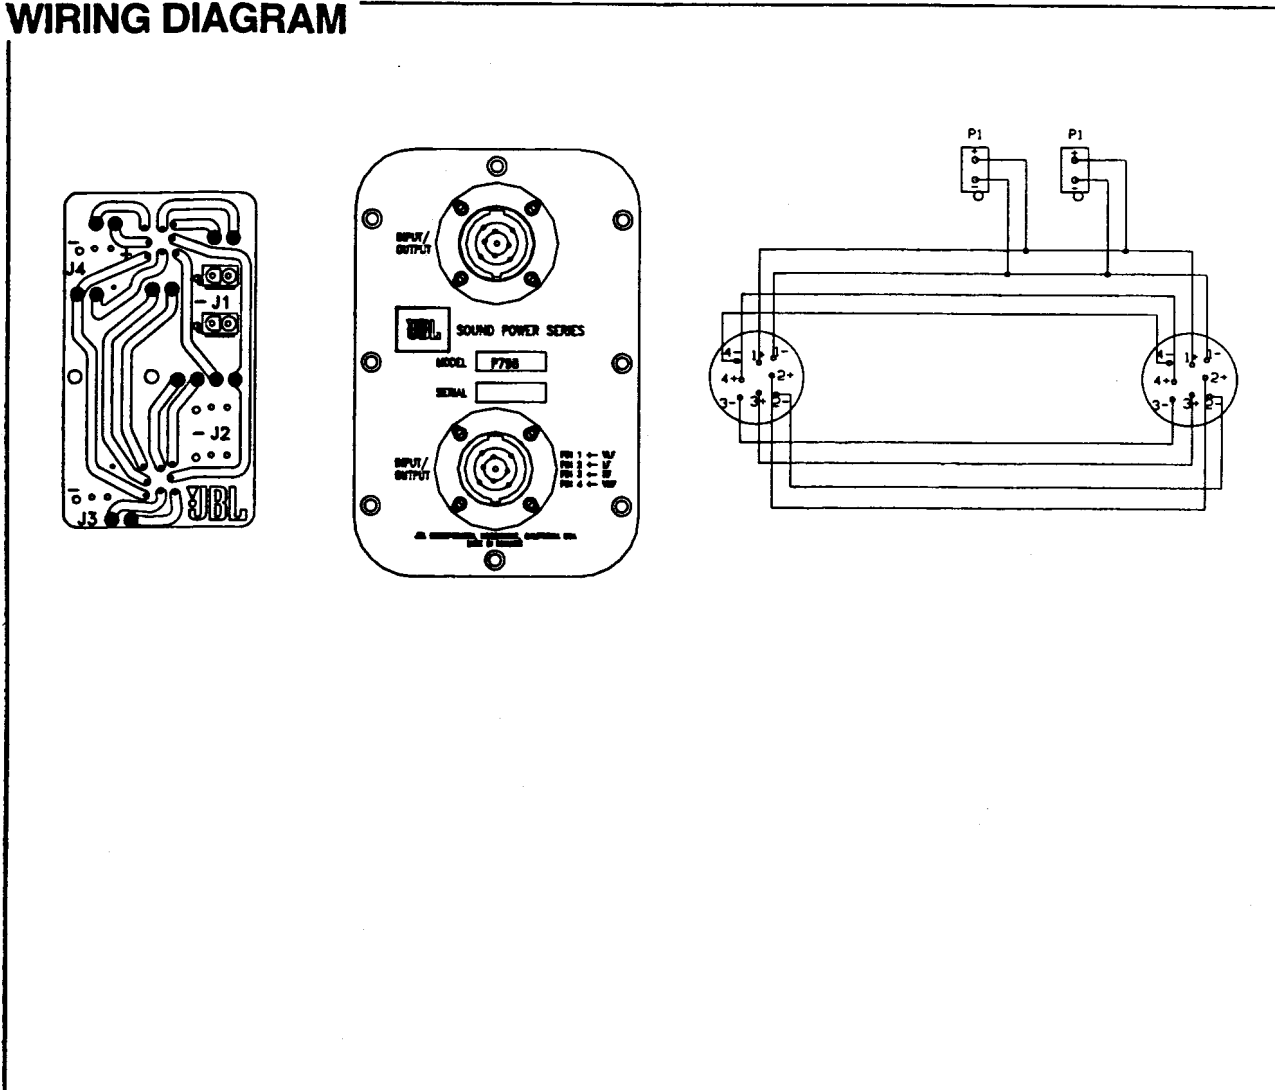

JBL P798

COMPONENT EXPLODED VIEW

