

Technical Manual

JBL SP125S/WH



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 4 ohm (2 x 8 ohms)
- Power Capacity: 1200W AES; 4800W Peak (2 x 600W AES; 2400W Peak)
- Frequency Range: 32 Hz – 1.7 kHz (–10dB)
- Sensitivity: 100 dB SPL, 1 Watt @ 1 Meter

SYSTEM COMPONENTS:

- Cabinet: (Not For Sale)
- Grille: 128-00373-65, 128-00213-00 (Wh)
- Low Frequency Transducer: 380mm (15 in.) Cone Transducer (2226HPL) (2)
- DC Resistance: 5.0 ohm ± 10% Aluminum Wire

SYSTEM COMPONENTS: (cont'd)

- Connector Assy: 129-00017-00

AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 7.0V Input, 20 Hz to 1.2 kHz
- B. L.F. Aural Sweep Test: 7.0V Input, 20 Hz to 1.2 kHz


PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 1137mm x 572mm x 572mm D (44.75 x 22.50 x 22.50 in. D)
- Shipping Weight: 120 lbs. (54.4 kg.)

WARRANTY INFORMATION:

- Refer to Warranty Statement packed with each product.

PACKAGE

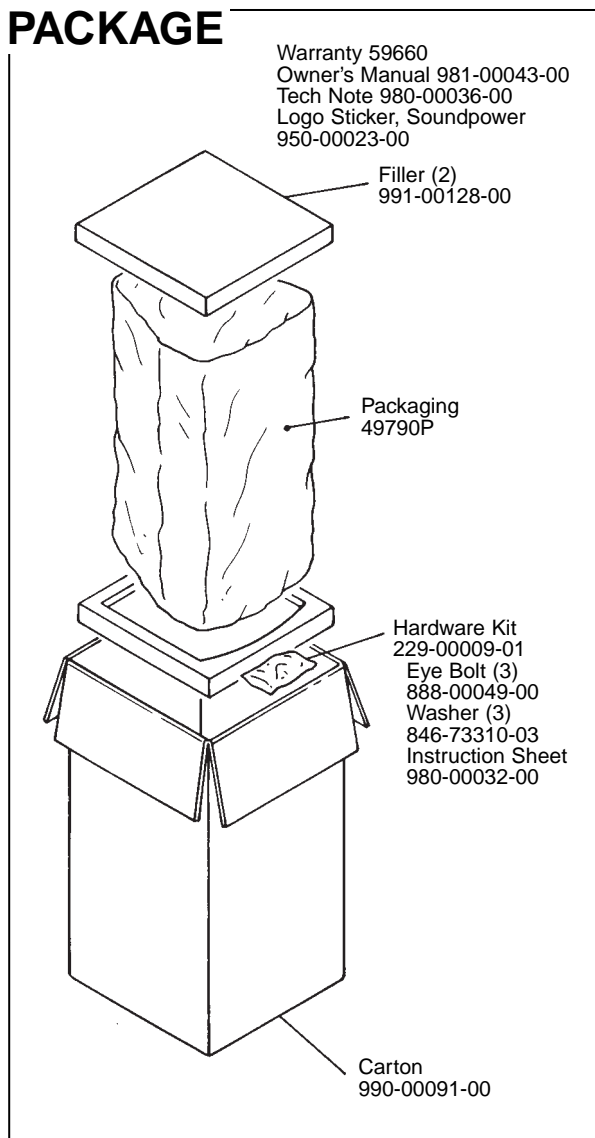

WIRING DIAGRAM

