

Technical Manual

JBL46120K

COMPACT SOUND REINFORCEMENT SYSTEM



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Capacity: Continuous Pink Noise: 200W
- Frequency Range: 80 Hz to 16 kHz (± 4 dB)
- Sensitivity: 97 dB SPL*
- Crossover Frequencies: 3 kHz

SYSTEM COMPONENTS:

- Cabinet: C46120K
- Grille: 64325
- Low Frequency Transducer: (2) 200mm (8 in.) Cone Transducer

SYSTEM COMPONENTS: (cont'd)

- High Frequency Transducer: 44mm (1.75 in.) Aluminum Diaphragm Compression Driver
- Crossover Network: 64329

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 438mm x 546mm x 254mm D (17.25 x 21.5 x 10.0 in. D)
- Shipping Weight: 45 lbs. (20.4 kg.)

WARRANTY INFORMATION:


- Refer to the Warranty Statement packed with each product.

*1 Watt (2.83 V RMS) @ 1 Meter


PACKAGE

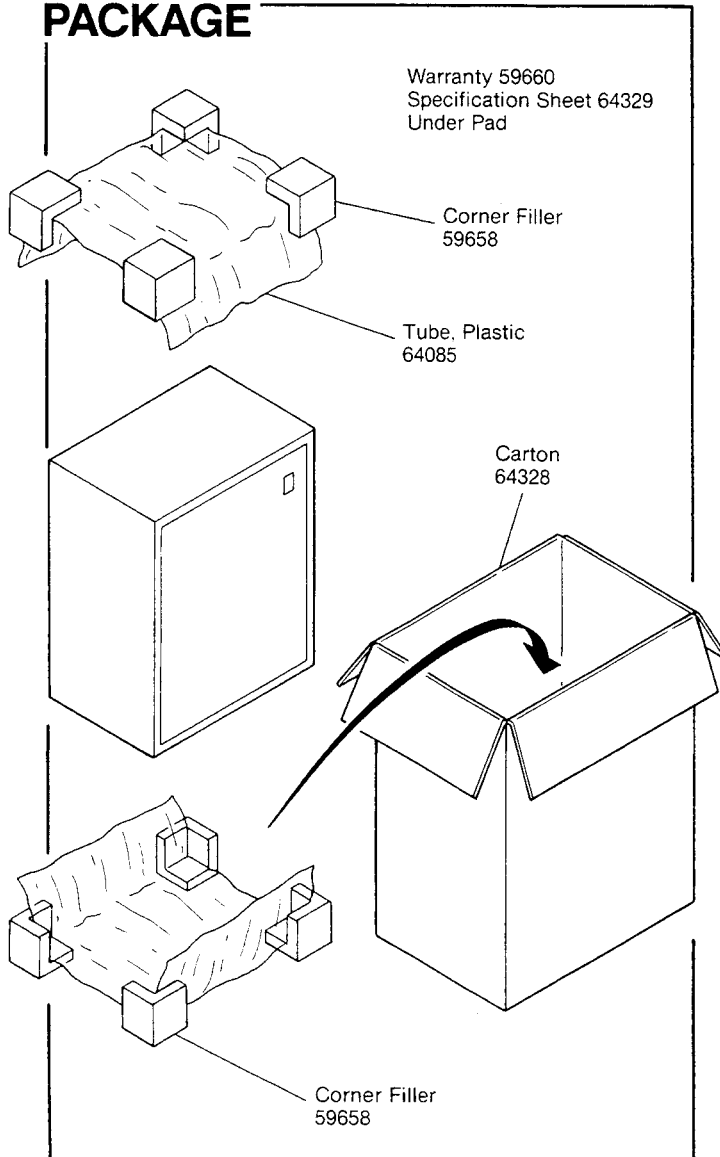

WIRING DIAGRAM

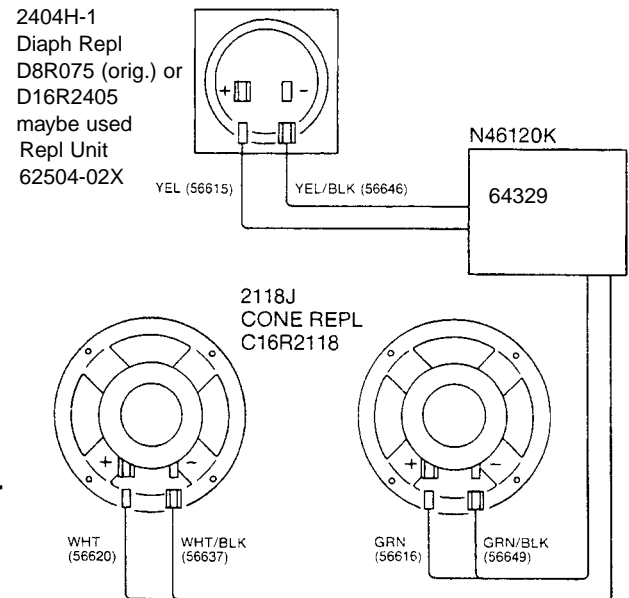


SCHEMATIC N46120K

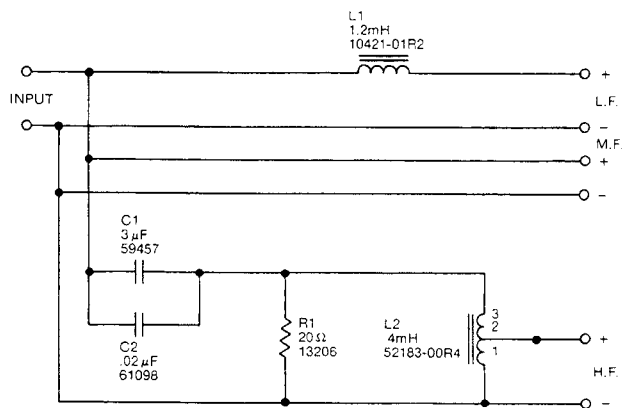

JBL46120K REV G

JBL46120K

COMPONENT EXPLODED VIEW

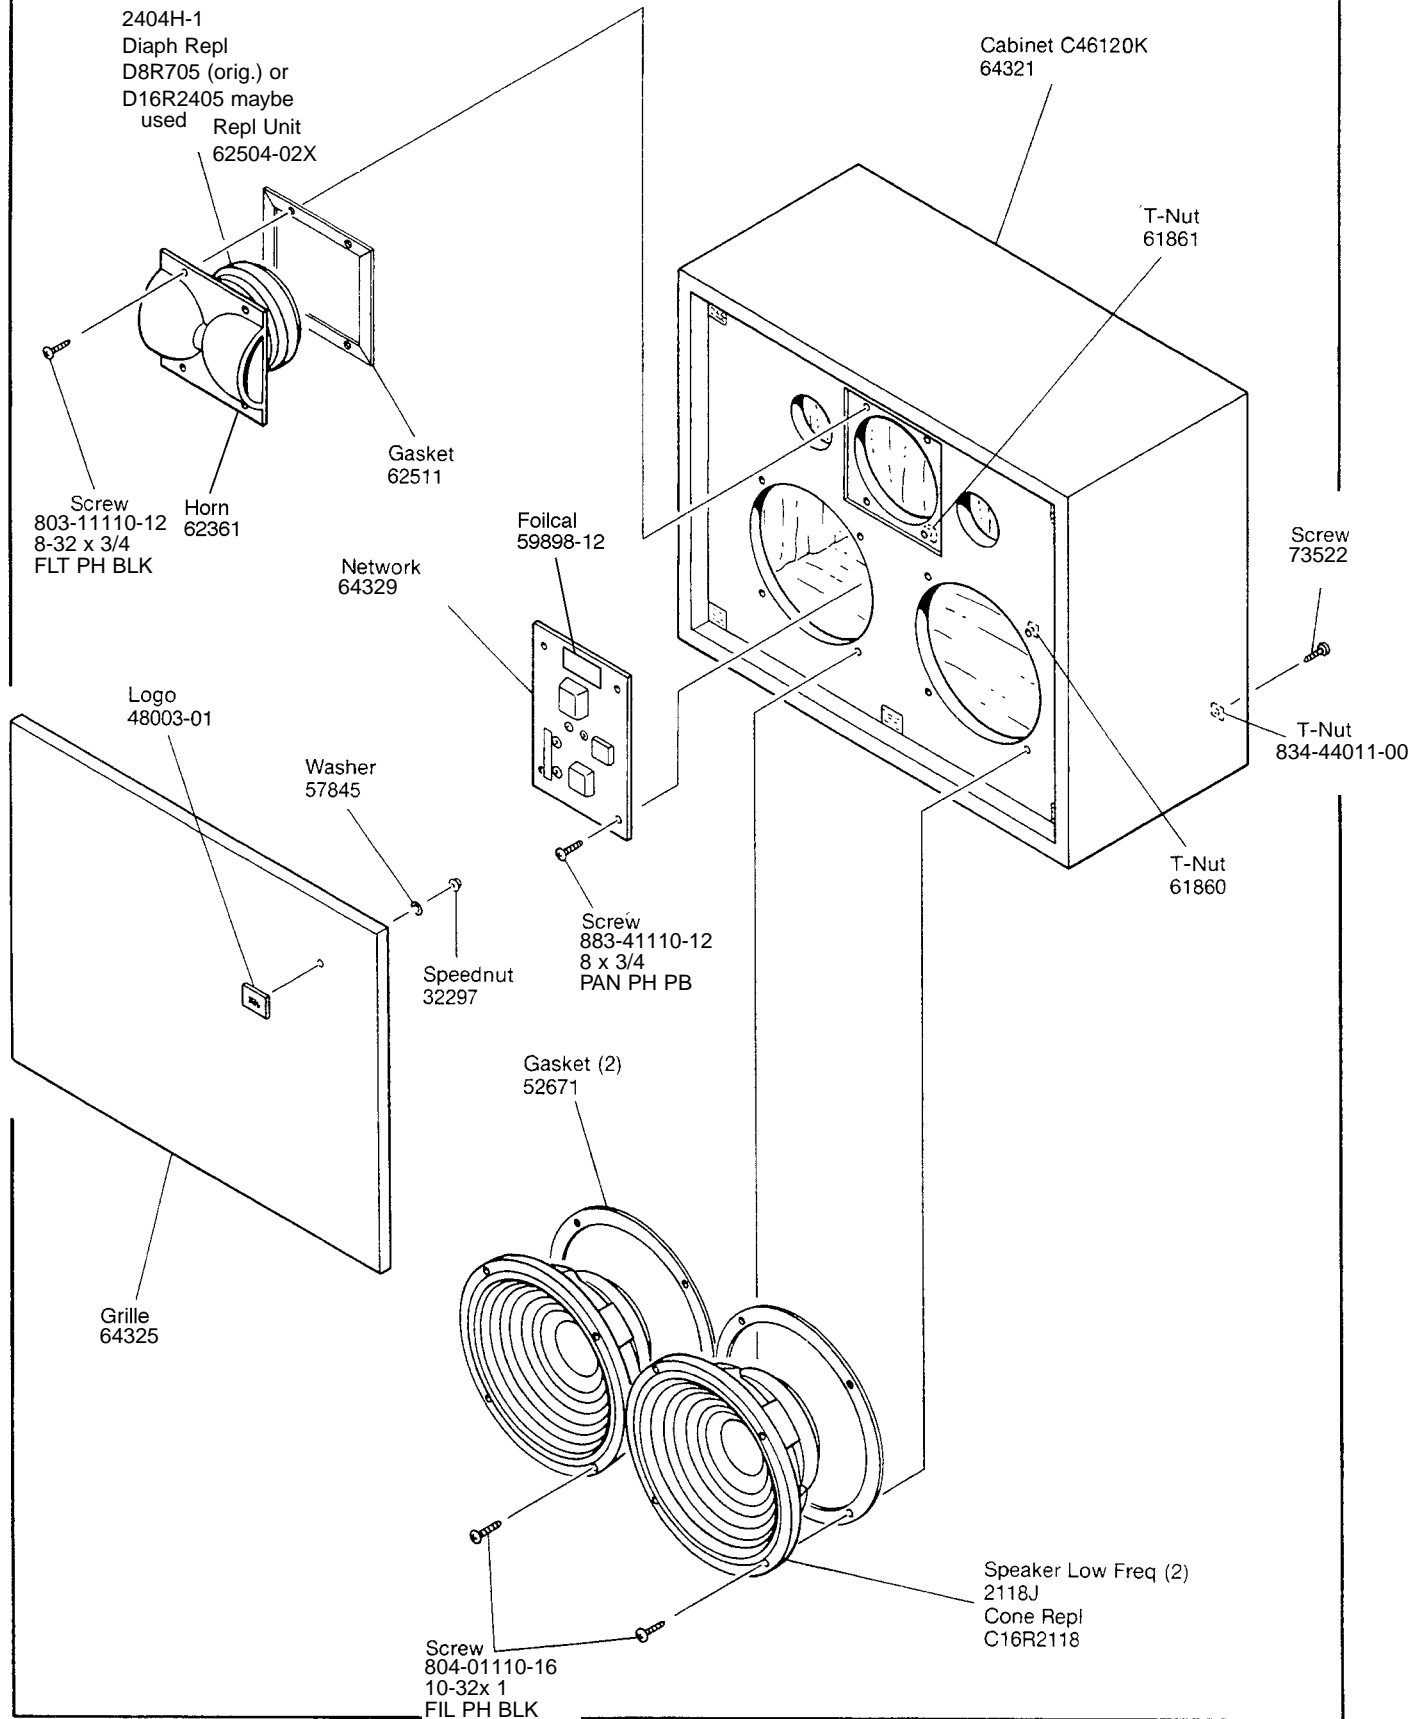

JBL46120K