

# Technical Manual

# JBL4648 LOW FREQUENCY SYSTEM

## SPECIFICATIONS



### ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 4 ohm
- Power Capacity: 400 Watts, Sine Wave  
800 Watts, Continuous Program
- Frequency Range: 30 Hz to 2 kHz
- Sensitivity: 100 dB SPL\*
- Crossover Frequencies: High Pass 40 Hz  
Low Pass 500 or 800 Hz

### SYSTEM COMPONENTS:

- Cabinet: C4508
- Grille: N/A

\*1 Watt (2.83 V RMS) @ 1 Meter

### SYSTEM COMPONENTS: (cont'd)

- Low Frequency Transducer: 380mm (15 in.) Cone Transducer
- Crossover Network: N/A


### PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 1060mm x 667mm x 464mm D  
(41.75 x 26.5 x 18.25 in. D)
- Shipping Weight: 108½ lbs. (49.2 kg.)


### WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.

## PACKAGE

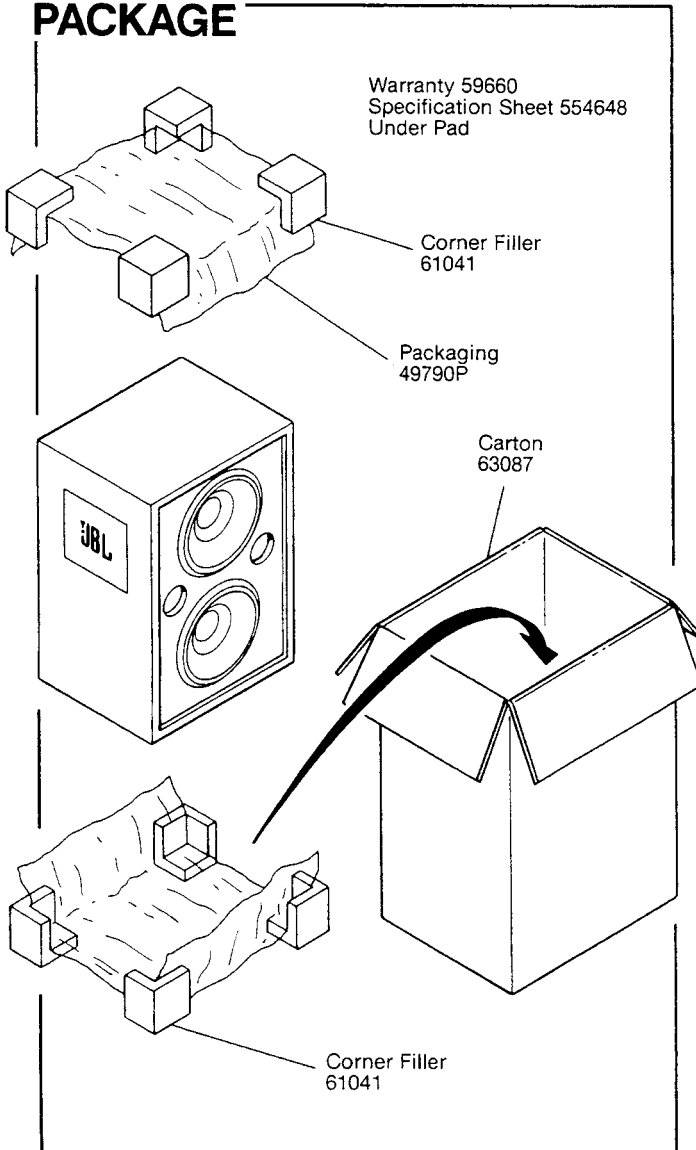


## WIRING DIAGRAM

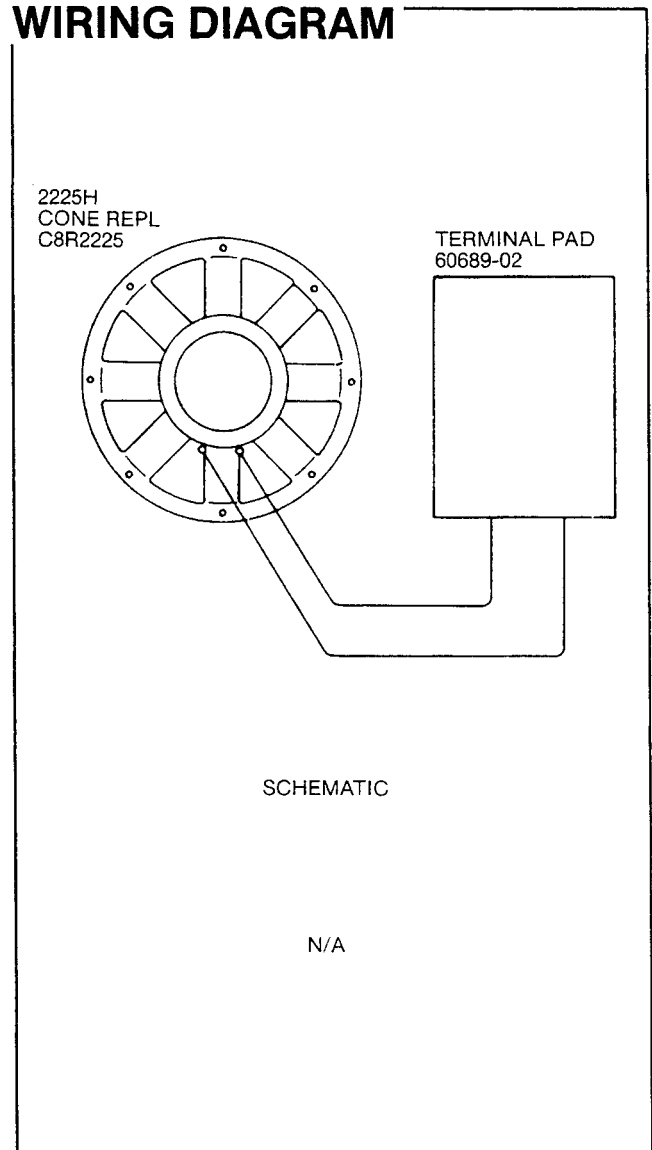

JBL4648 REV D

# JBL4648

## COMPONENT EXPLODED VIEW

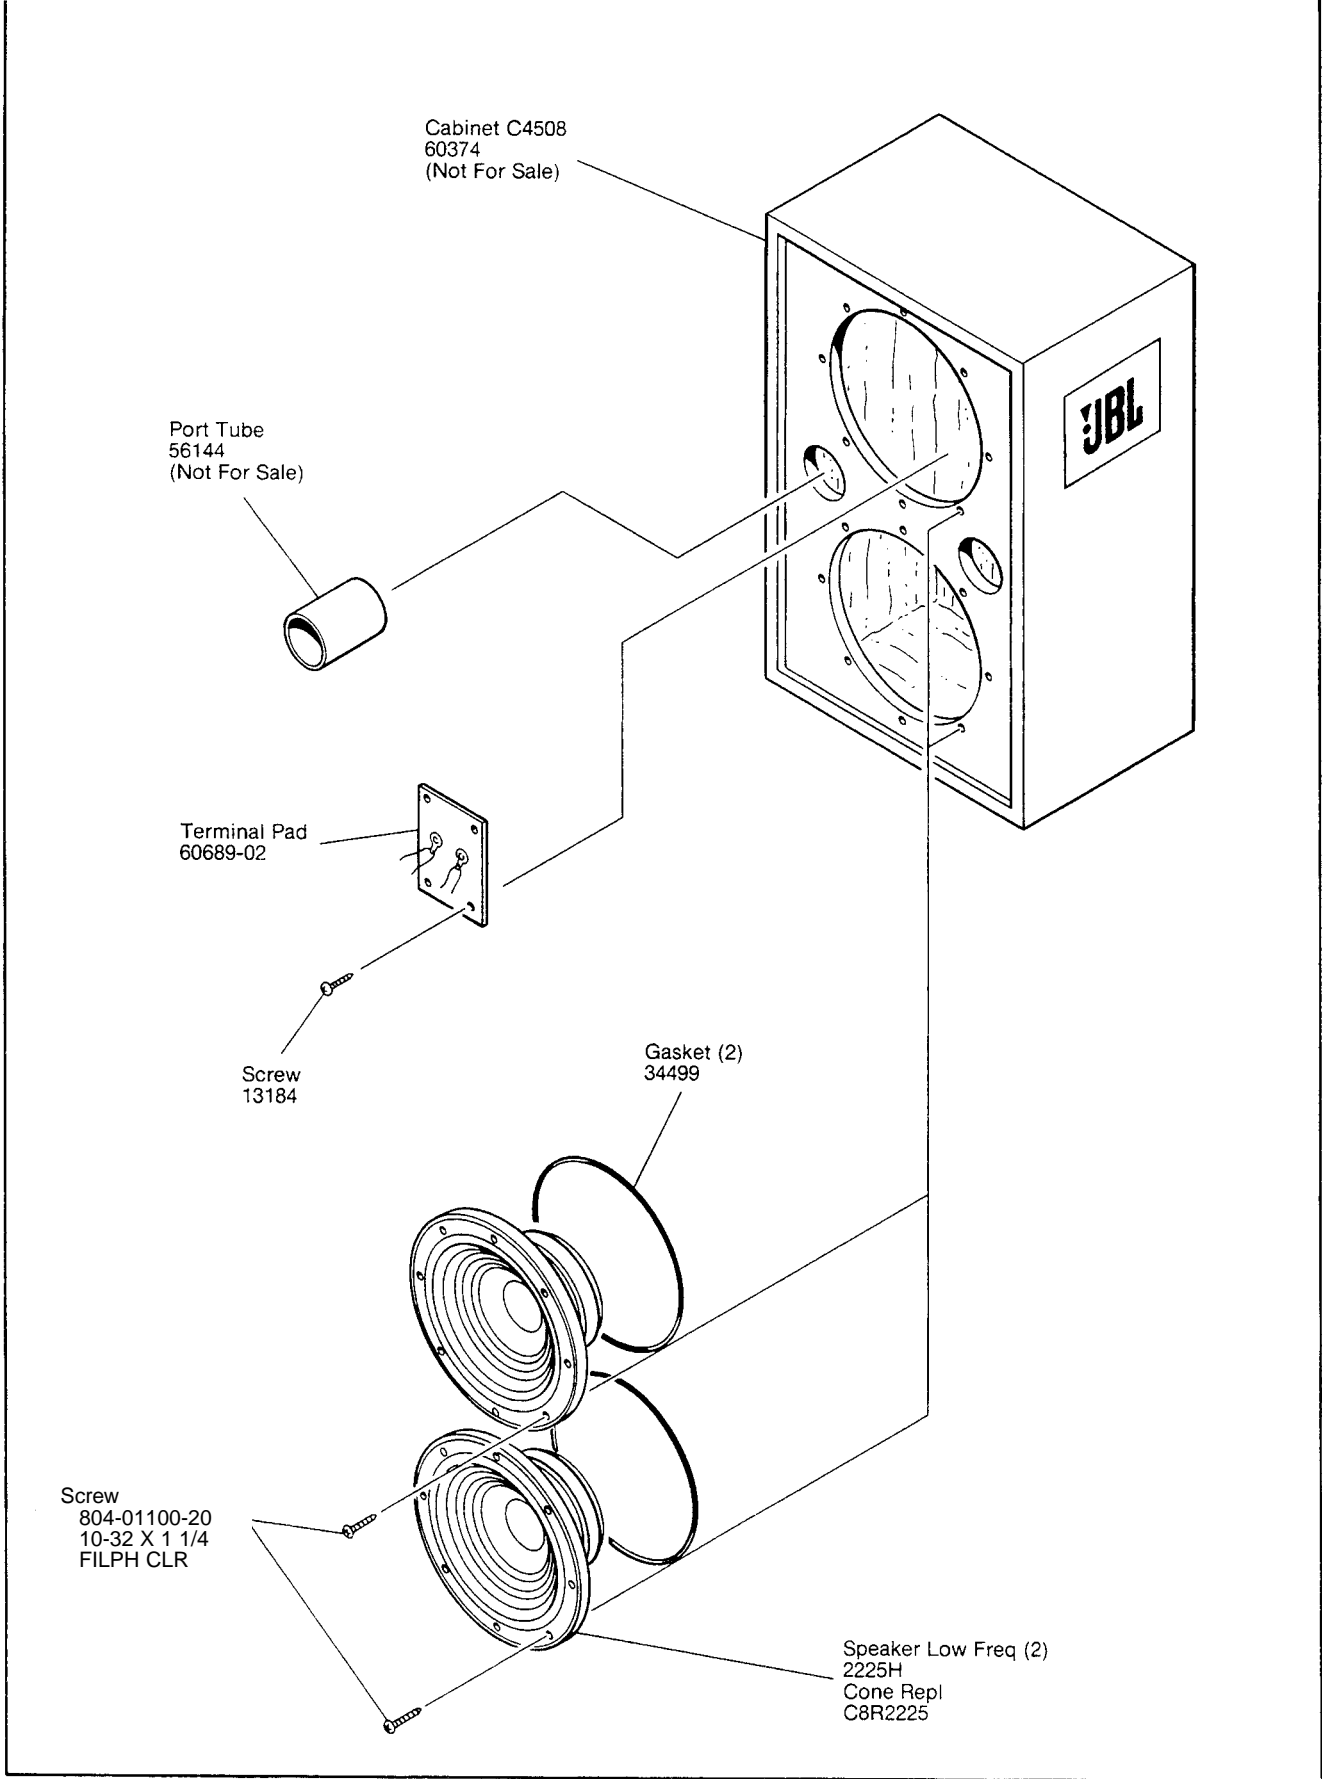

JBL4648