

# Technical Manual

# JBL I771



## SPECIFICATIONS

### ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: LF: 4 ohm  
HF: 8 ohm
- Power Rating: HF: 150 W Continuous Program above 1 kHz  
LF: 1200 W AES
- Frequency Response: 45 Hz - 16 kHz
- Sensitivity: LF: 102 dB (1m, 2V)  
HF: 111 dB (1m, 2.83V)
- Crossover Frequency: Active C236

### SYSTEM COMPONENTS:

- Cabinet: CI771
- Grill: GI771
- Low Frequency Transducer: 380 mm (15 in)  
Cone Transducer (2227H)
- DC Resistance: 5.0 ohm  $\pm$  10% Copper Wire

### SYSTEM COMPONENTS:

- High Frequency Transducer: 100 mm (4 in)  
Pure Titanium Diaphragm  
Compression Driver (2451H)
- DC Resistance: 4.10 ohm  $\pm$  8% Aluminium Wire

### PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 1140 x 553 x 480 mm  
44.88 x 21.78 x 18.88 in)
- Shipping Weight: 78.5 kg (172.7 lb)

### NEUTRIK CONNECTOR

- Pins 1  $\pm$  = Loophrough
- Pins 2  $\pm$  = Input LF
- Pins 3  $\pm$  = Input HF
- Pins 4  $\pm$  = Loophrough

⊕ Denotes outward cone movement with positive voltage applied to LF pin 2 + and HF pin 3 +.

## WIRING DIAGRAM

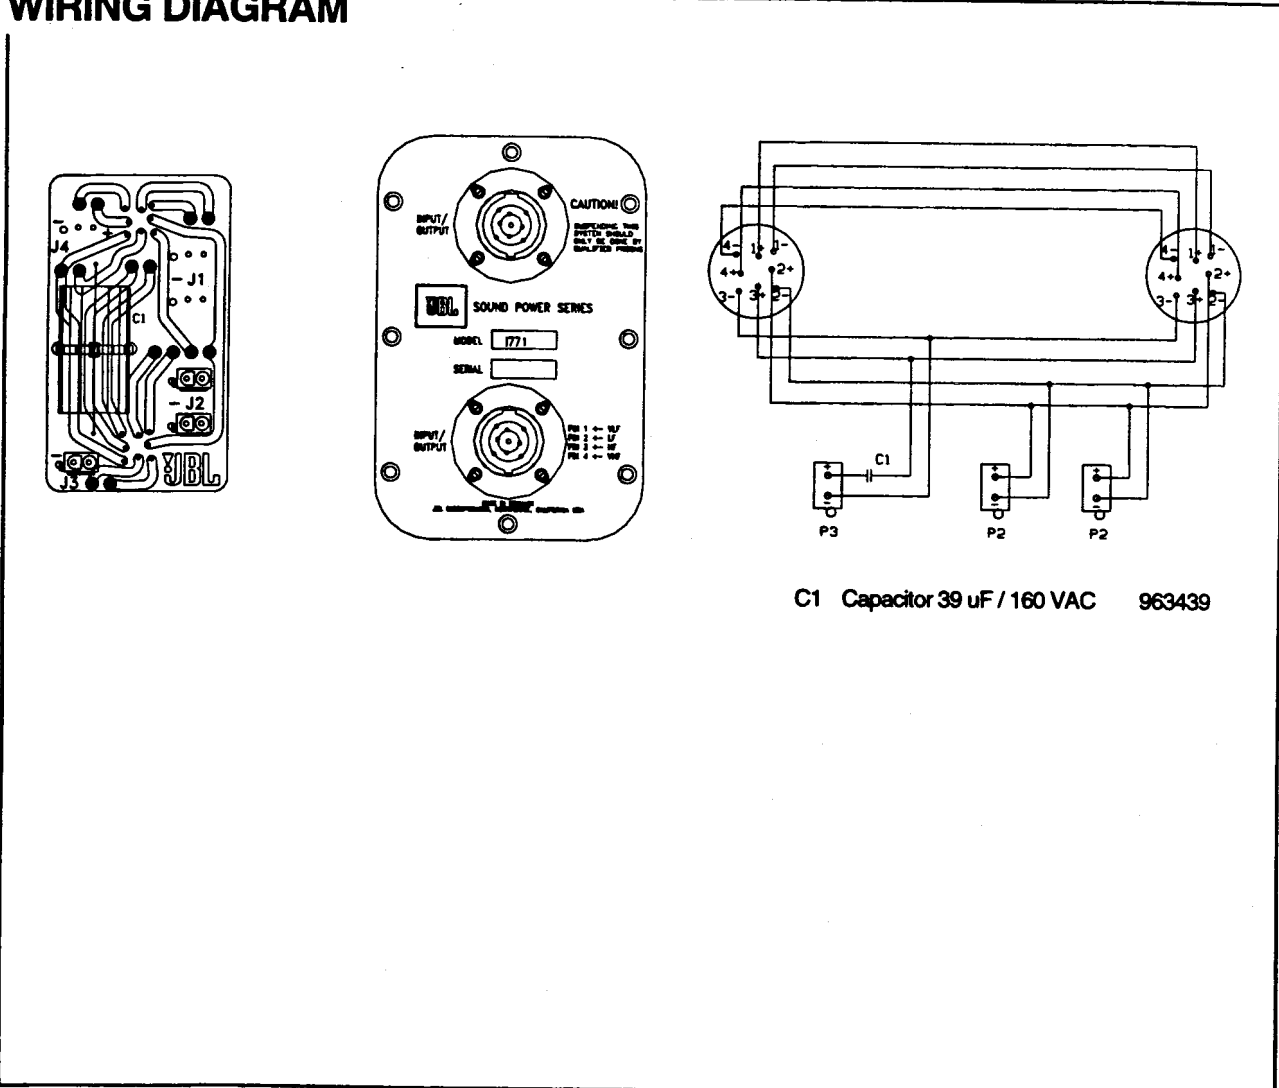

JBL I771

# JBL I771

## COMPONENT EXPLODED VIEW

### NOTE!

A complete horn consists of 2 part numbers.

